

VULCAN®

GAS & ELECTRIC HOT WATER



GAS



ELECTRIC



THAT'S VULCAN® VALUE

High quality and performance at a very affordable price. Three good reasons why Vulcan is such a popular choice for reliable water heating.

Vulcan is built with the best: Quality materials and proven technology make Vulcan a great choice.

Vulcan is tough: The Vulcan storage cylinder is made from high strength steel tough enough to withstand varying water and heating cycle pressures.

Vulcan is adaptable: The balanced flue and steel jackets make Vulcan gas models easy to install and easy to live with. They can be installed on an approved base against a wall or recessed into a wall cavity.

Vulcan has backup: If you need a spare part for your Vulcan it's good to know they are readily available across the country and can be serviced by most plumbers or electricians.



FORGED TOUGH

HOW TO CHOOSE THE RIGHT VULCAN®

Many households change over time, so it's important to make sure you select the model to suit your needs both now and as your family grows. Take into consideration appliances such as washing machines and dishwashers, which can use as much hot water as one person. Also allow for family additions and don't forget – small children grow into large teenagers.

Use the charts below as a guide for calculating your average usage, and for selecting the right Vulcan model for you.

Vulcan Gas			
Warranty		Model	
Vulcan Quick Recovery	5 Years†	641135 (648135)	641170 (648170)
Trim Kit	–	FK135	FK170
AGA Energy Gas Rating	Stars	3 (4)	3 (4)
Storage Capacity	Litres	135	170
Dimensions	A	mm	1558
	B	mm	422
	C	mm	502
	D	mm	988
	E	mm	328
	F	mm	298
	G	mm	1478
	K	mm	473
	L	mm	208
Approx. Weight Empty	kg	59	69
Relief Valve Setting	kPa	1400	1400
ECV Setting #	kPa	1200	1200
Max. Supply Pressure	kPa		
With Expansion Control Valve		960	960
Without Expansion Control Valve		1120	1120
Hourly Gas Consumption			
	Natural	MJ	30 (27)
	Propane	MJ	30 (27)
Water Connections (LHS)		RP ¾/20	RP ¾/20
Gas Connection		RP ½/15	RP ½/15

Note: Outdoor models must be installed with the back of the water heater against a wall. Minimum distances from the flue terminal to openings into a building, corners and return walls apply.

Vulcan Electric									
Warranty									
Vulcan Single Element Left Handed	5 Years†		661080	661125	661160	661250	661315	661400	
Vulcan Single Element Dual Hand	5 Years†	691M50							
Vulcan Twin Element							662315	662400	
Hot Water Delivery	Litres	50	80	125	160	250	315	400	
Storage Capacity	Litres	53	90	135	165	270	325	410	
Boost Capacity	Litres	–	–	–	–	–	50	90	
Dimensions	A	mm	695	945	1340	1610	1395	1640	1840
	B	mm	400**	480	480	480	640	640	690
	C	mm	429	515	515	515	675	675	730
	D	mm	397	702	1102	1332	1117	1317	1479
	E	mm	142	64	64	104	73	113	121
	F	mm	80	84	84	84	128	128	129
	G	mm	–	–	–	–	–	1255	1346
	H	degrees	26	23	23	23	32	32	30
	J	degrees	59	58	58	58	88	88	83
	Approx. Weight Empty	kg	30	34	46	52	70	88	112
Inlet/Outlet Connections	RP	¾/20	¾/20	¾/20	¾/20	¾/20	¾/20	¾/20	¾/20
Relief Valve Setting	kPa	1400	1400	1400	1400	1000	1000	1000	
ECV Setting #	kPa	1200	1200	1200	1200	850	850	850	
Max. Supply Pressure	kPa								
With Expansion Control Valve		960	960	960	960	680	680	680	
Without Expansion Control Valve		1120	1120	1120	1120	800	800	800	

Note: All water heaters operate on 240 volt single phase electricity supply.



** 400mm diameter applies to product manufactured after 17 July, 2012.

ECV not supplied with water heater.

† Warranty: 5 years on cylinder. 3 year labour on cylinder. 1 year on parts and labour.

Conditions apply. See the Vulcan warranty set out in the Owner's Guide & Installation Instructions or view at www.vulcan.com.au/warranty.

Storage Tank Dimensions

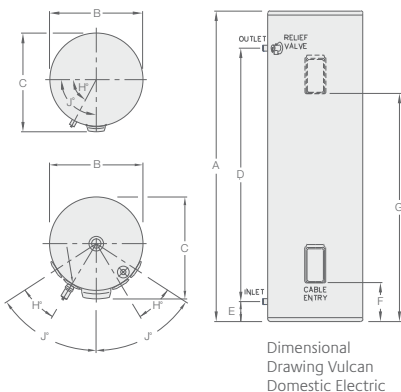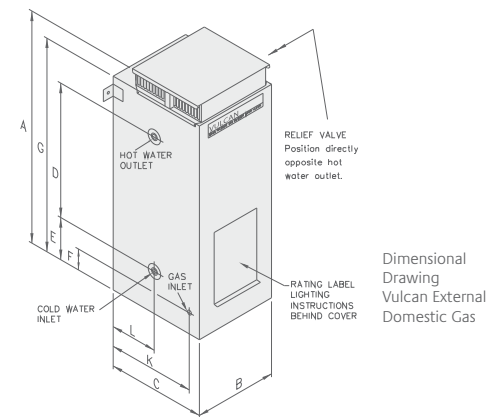

SIZING GUIDE

Vulcan Gas							
Storage Capacity in Litres		135	170				
No. of people – Moderate Climate		2-4	3-5				
No. of people – Cool Climate		2-3	3-4				
Vulcan Electric							
Delivery in Litres		50	80	125	160	250	400
Continuous Tariff							
No. of People		1-2	2-3	2-4	3-5	4-6	5-9
No. of Bedrooms					1-2	3	4-5
Off-Peak Tariff							
No. of People					1-3	2-4	4-6

Materials and data are subject to change without notice.

Rheem Australia Pty Ltd.

1 Alan Street, Rydalmere, New South Wales 2116, Australia

National Sales Phone: 132 552

National Sales Fax: 1300 554 821

National Service Phone: 131 031

® Registered trademark of Rheem Australia Pty Ltd.

™ Trademark of SAI Global.

Printed October 2012



VULCAN®